


Detach

Low Odor Floor Stripper



Detach Low Odor Floor Finish Stripper is an extra strength floor stripper formulated for use in environments where low odor and slow-drying stripping procedures are required. Powerful formula penetrates and emulsifies tough build-ups and burnished finishes. Formulated to remove both conventional and green zinc-free finishes.

SURFACES

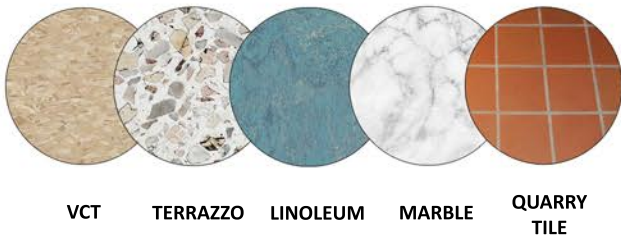

VCT TERRAZZO LINOLEUM MARBLE QUARRY
TILE

DIRECTIONS

- Mix stripper per the following dilutions:
Heavy coating removal: 1:4 (32 US oz per gallon/250 ml per 1 liter of water).
Normal coating removal: 1:6 (21.5 US oz per gallon/166 ml per 1 liter of water).
Light coating removal: 1:8 (16 US oz per gallon/125 ml per 1 liter of water).
- Apply solution liberally to the floor and allow to soak for 10 minutes ensuring the solution does not dry.
- Scrub floor with automatic scrubber or stripping machine. Pick up dirty solution with automatic scrubber or wet vac.
- Rinse thoroughly with clean water and allow floor to dry completely before applying any finish.

NOTE: Test floor for color fastness in an inconspicuous area.

TECHNICAL DATA

Appearance	Clear liquid
Viscosity (Brookfield)	<10 centipoise
Flash Point	>200°F
VOC	25.7% (as supplied) 5.1% (1:4) 2.8% (1:8)
pH	12.5 (as supplied)
Fragrance	None added
Shelf Life	2 years
Density	8.8 lb/gal @68°F 1.05 kg/L @ 20°C
Freeze/Thaw	Passes 3 cycles

PRODUCT INFO

Product Code	15625
Volume	2.5 US gallon
Shipping Package	2 x 2.5 gallons
Pallet Quantity	48


Advanced Technologies for Facilities

Hummelstown, PA 17036

(877) 843-3070

www.ameritechproducts.net